


SPC  
数据接口

# 数显可换测头卡尺 型号 1124-300A




1124-300A


球面/平面短测头(标配)





球面/平面长测头(标配)



球面薄片短测头(标配)



球面薄片长测头(标配)

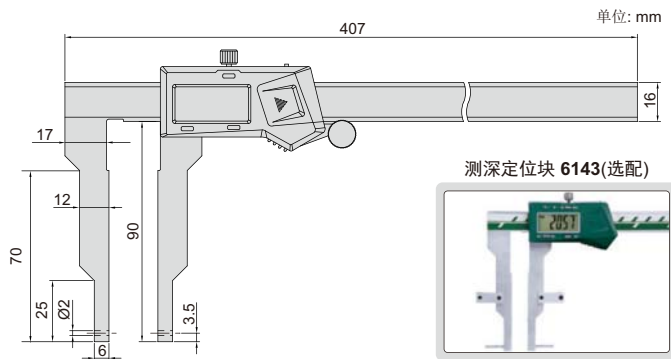


测深定位块 6143(选配)




- 配四对可换测头
- 配外测对零块(10mm量块)
- 分辨率: 0.01mm/0.0005"
- 按键: 开/关, 设置数值, 公/英制转换, 数值预置(+, -)
- 自动关机, 拉动尺身开机
- CR2032电池
- 数据接口
- 不锈钢尺身
- 可选附件: 测头(型号1526-T101, 7392, 7391, 7381, 7321), 测深定位块(型号6143), 数据传输线(型号7306-20, 7302-SPC5A/SPC5B, 7305-SPC2A)

测量内凹槽和外凹槽

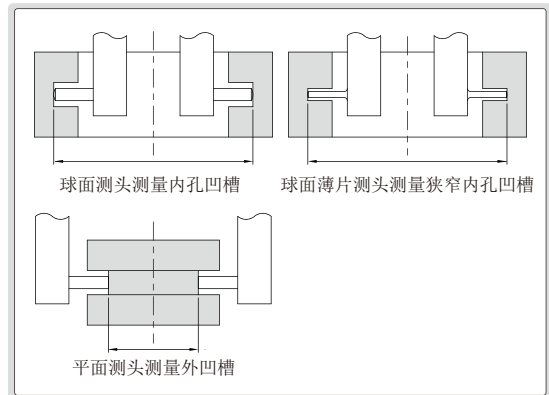

测头	测量范围	精度	适用范围
球面/平面短测头	24-324mm/1-12.7"(内尺寸) 0-288mm/0-11.3"(外尺寸)	±0.04mm	球面测头测量内孔凹槽(小孔) 平面测头测量外凹槽
球面/平面长测头	40-340mm/1.5-13.3"(内尺寸) 0-272mm/0-10.7"(外尺寸)	±0.04mm	球面测头测量内孔凹槽(大孔) 平面测头测量外凹槽
球面薄片短测头	24-324mm/1-12.7"(内尺寸) 0-288mm/0-11.3"(外尺寸)	±0.04mm	测量狭窄内孔凹槽(小孔)
球面薄片长测头	40-340mm/1.5-13.3"(内尺寸) 0-272mm/0-10.7"(外尺寸)	±0.04mm	测量狭窄内孔凹槽(大孔)

测头安装方式



多功能测头7392(选配, 页码22)



球测头7391(选配, 页码22)



螺纹测头7381, 7321(选配, 页码22)



外测对零块(标配)

