


# 螺纹千分尺



3281-25AC




(mm)

型号	测量范围	L	b	55°标准杆(选配)
3281-25AC	0-25mm	42	26	-
3281-50AC	25-50mm	67	38	3281-SP1
3281-75AC	50-75mm	92	50	3281-SP2
3281-100AC	75-100mm	117.6	62	3281-SP3
3281-125AC	100-125mm	143	70	3281-SP4
3281-150AC	125-150mm	168.2	82	3281-SP5
3281-175AC	150-175mm	192	94.5	3281-SP6
3281-200AC	175-200mm	217	107	3281-SP7


安装测头后精度

(mm)

螺距	测量范围					
	0-25	25-50	50-75	75-100	100-125	125-200
0.4~0.5	±0.01	-	-	-	-	-
0.6~0.8	±0.01	±0.013	-	-	-	-
1~1.25	±0.012	±0.015	±0.017	±0.017	-	-
1.5~2.0	±0.014	±0.017	±0.019	±0.019	±0.020	±0.023
2.5~3.5	±0.016	±0.019	±0.021	±0.021	±0.023	±0.025
4.0~7.0	-	±0.021	±0.023	±0.023	±0.025	±0.028

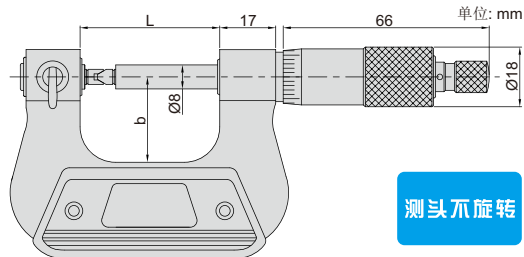

测头不旋转



- 用于测量螺纹中径
- 分度值:0.01mm
- 直进式,测头不旋转
- 棘轮测力
- 配60°标准杆
- 可选附件:55°标准杆,测头(7381系列)